

20W-SOUND-PROJECTOR **SPOT-2010T/EN5424** IN **ABS-VERSION**



**S
P
O
T**

**2010
ABS**

**EN
5424**

**S
O
U
N
D**

**P
R
O
J
E
C
T
O
R**

20W

10W

5W

- DIRECTIVITY FOR SPEECH-APPLICATION
- **LOW FLAMMABLE** ABS-PLASTIC-MATERIAL ACC. TO EN 60695-11-20, CLASS 5VB
- SPLASH-WATER-PROTECTED ABS-CABINET
- **ALU-GRILL, ALU-BRACKET & V2A-SCREWS**
- THREE **100-VOLT**-TAPS VIA CABLE & JUNCTION BOX
- SPECIAL **DIN 912-ISO 4762** SCREWS
- OPTIONAL **CERAMIC**-CLAMP & **THERMO**-FUSE AVAILABLE


**SPOT-2010T/EN-5424-CERTIFICATED VERSION:
ORDER-NUMBER:**

SPOT-2010T/EN-5424 (TYPE-B / WEATHER-PROOF-OUTDOOR-CERTIFICATED)
CPD-NR: 1293-CPD-0268

TECHNICAL DATA:

SPOT-2010-ABS/EN5424

Loudspeaker:	25W-5"-Broadband
Power-Consumption:	100V-20-10-5W
Frequency-Range:	110-17 000 Hz
EN-Sensitivity 1W/4M:	78,0 dB
SPL max 20W/4M:	91,8 dB
SPL 1W/1M max. EASE/Ulysses:	100 dB (3,8 kHz)
SPL 20W/1M max. EASE/Ulysses:	112 dB (3,8 kHz)
Radiation H (0,5/1/2/4kHz):	180°/180°/80°/75°
Radiation V (0,5/1/2/4kHz):	180°/180°/80°/75°
EN-5424-Degree:	EN-Type-B, weather-proof-outdoor-certificated
Dimensions:	138 x 205 mm
Weight:	1,6 Kg
Colour:	white

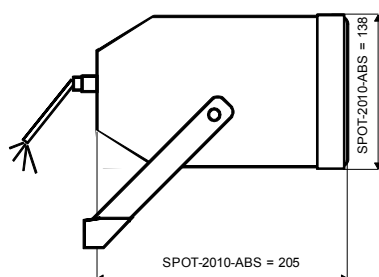

EN-5424-PAGE-27-A






RADIATION DATA 20W-SOUND-PROJECTOR SPOT-2010T/EN5424

Testing Method	Axis	500Hz	1000Hz	2000Hz	4000Hz
EN5424	HOR	180°	180°	80°	75°
EN5424	VER	180°	180°	80°	75°
EASE/ULYSSES	HOR	360°	240°	110°	100°
EASE/ULYSSES	VER	360°	240°	110°	100°

Source Data: D:\Strauch\Elko-Schmid\Elko-Schmid\GLL\SPOT2010\Daten\HOR\2010-HOR.FOX

Copyright by Four-Audio GmbH & Co KG Licensed to AAC

Horizontal Isobars of: Elko-Schmid SPOT-2010

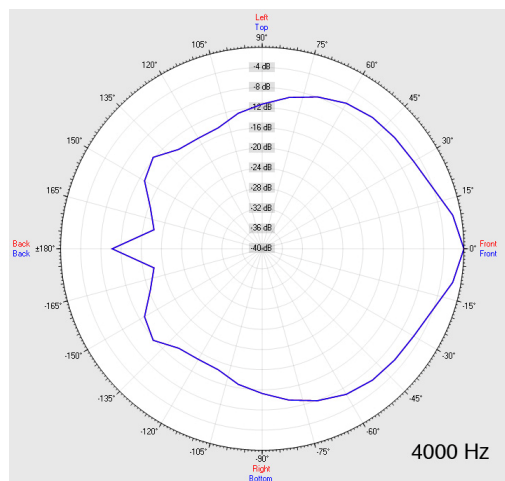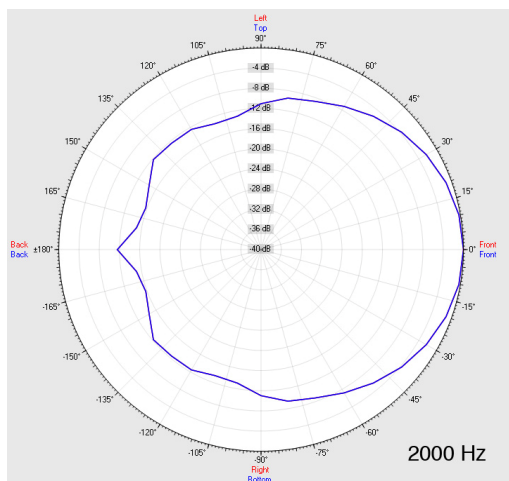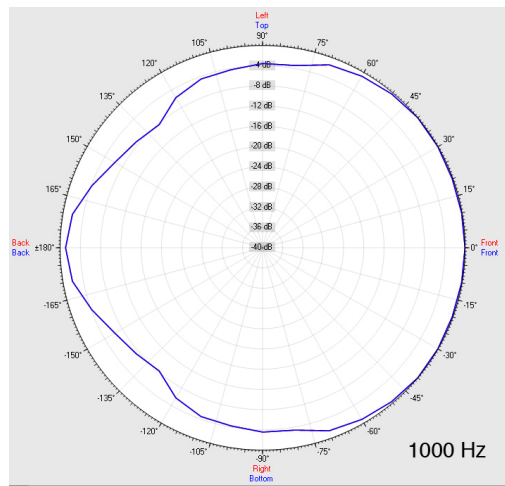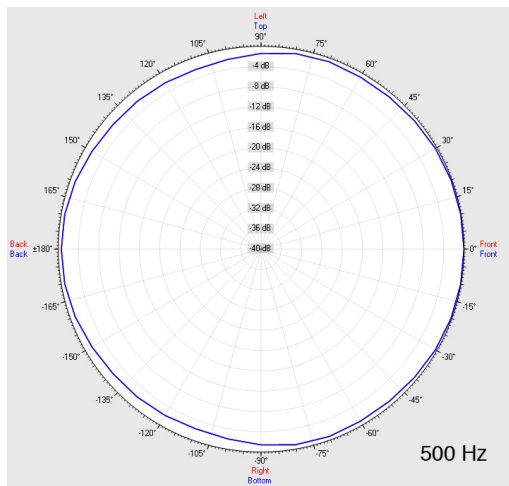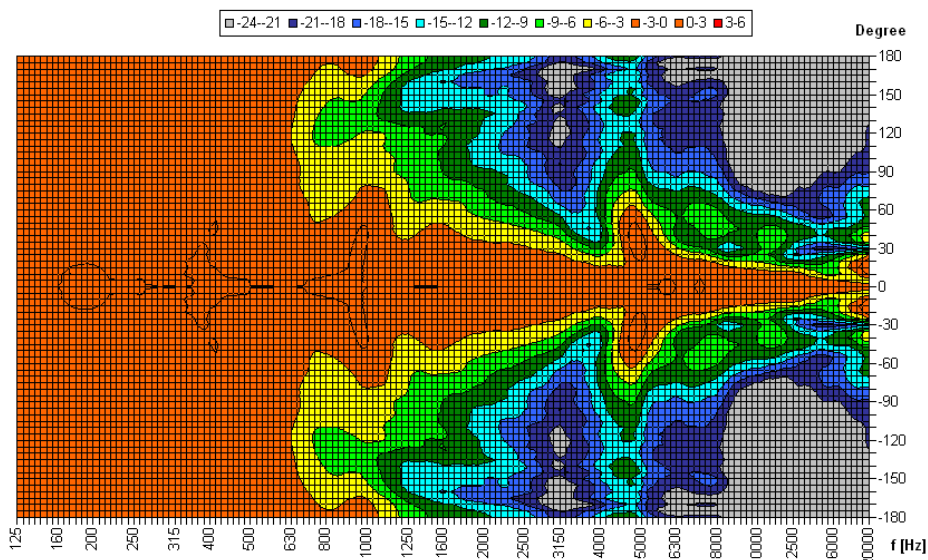

SPOT

2010
ABS

EN
5424

SOUND

PROJECTOR

20W

10W

5W