

CLB-265-AB CEILING-SPEAKER WITH 2 DISCRETE SYSTEM-LINES A / B

CLB

265
A/B

A / B

SYSTEM
LINE

SPEAKER




- **TWO AUTONOMOUS** LOUDSPEAKER PER SYSTEM
- **TWO AUTONOMOUS** 100-VOLT-TRANSFORMER PER SYSTEM
- ENABLE OPERATION OF SPEAKER VIA TWO DISCRETE CABLE-LINES
- IN CASE OF FAILURE OF ONE LINE, CONTINOUS FUNCTION OF THE SECOND-LINE
- **50-HZ-STABLE** 100-V-TRANSFORMER
- **TOUCH-PROTECTED** 100-V-QUICK-CONNECTING-CLAMP
- OPTIONAL CERAMIC-CONNECTING-CLAMP & THERMO-FUSE AVAILABLE
- **CUSTOM COLOUR & WEATHER-PROOF**-VERSIONS OPTIONAL
- **FULL-METAL**-VERSION OR LOW-COST **ABS/METAL**-VERSION AVAILABLE

TECHNICAL DATA:


CLB-265-AB

CLB-265-AB-PLUS

Loudspeaker:	2 x 15W 165 x 70-mm-Fullrange	2 x 15W 165 x 70-mm-Fullrange
Power-Consumption:	2 x 100V-6-3-1.5W	2 x 100V-6-3-1,5W
Frequency-Range:	70-20000 Hz	70-20000 Hz
SPL 1W/1m:	93 dB	93 dB
SPL xW/1m:	101 dB	101 dB
Dimensions:	268 mm x 80 mm	268 x 80 mm
Ceiling-Cutout:	245 mm	240 mm
Weight:	1,4 Kg (ca. 1,8 with FD)	1,6 Kg (ca. 2 Kg with FD)
Material:	ABS (UL-94) / Metal-Grill	FULL-Metal
Colour:	White similar RAL 9010	White similar RAL 9010
optional:	Firedome FT-265F	Firedome FT-265F

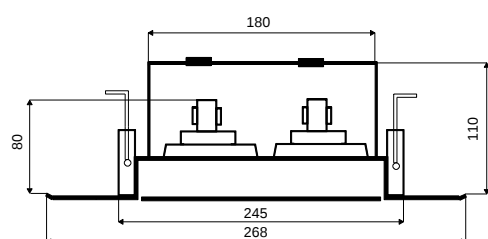

CLB-265-AB

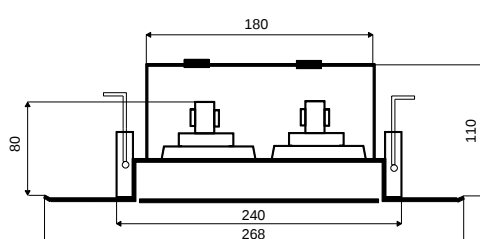

CLB-265-AB-PLUS